


MicroPoly® Standard Solid Profiles

MicroPoly Lubricants are solid, and can be processed into a variety of shapes with various polymer processing techniques.

Typical Applications for MicroPoly Solid Profiles:

- Bushings
- Chain lubrication
- Spherical plain bearing lubrication
- Wear plates
- Wheel flange lubrication
- Custom profiles
(see page 14 in catalog)

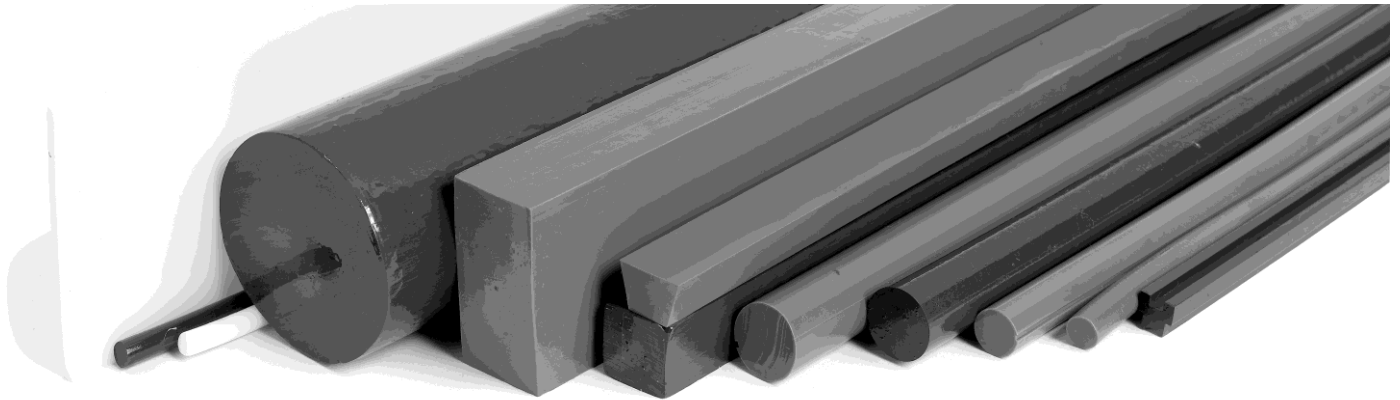

Standard MicroPoly Solid Profiles

Nominal Diameter	Cross-section
3.3"	round
2.35"	round
1"	round
3/4"	round
5/8"	round
1/2"	round
5/16"	round
1/4"	round
20 mm	round
13 mm	round
9 mm	round

Nominal Size	Cross-section
3/4"	square
1/8"	square
1.25" x 2"-6"	rectangle
1" x 2"	rectangle
1 11/16" x 3/4"	rectangle
3/4" x 1 3/4"	rectangle
0.061" x 2.6"	rectangle
0.18" x 3.0"	rectangle
1/2" x 4"	rectangle
1" x 4"	rectangle
1/2" top, 1/2" high, 3/4" base	trapezoid

Profiles are available in a variety of lengths. Minimum order quantities may apply.

These profiles are available in MicroPoly formulas: MPI-0779 and MPF-0696